


Generator set
Sound-proof type
QSV7KS-AU

SPECIFICATIONS



1 Standards & Conditions

Design Standards

The designs and the productions are in conformity with:

- Conformite Europeenne (CE)
- ISO8528-5:2005
- AS 3000-2018
- AS 3010-2017

- Remote run connector
- 1x12V/60AH sealed for life maintenance free battery
- Lockable battery isolator switch
- Powder coated canopy
- 50°C radiator
- Steel base frame
- Vibration isolators between the engine/alternator and base frame
- Dry type air filter
- Base fuel tank for 50 hours running
- Drain points for fuel tank
- Operation Manual / Specifications

Environmental Operating Conditions

- Installation place: Outdoors or indoors (well ventilated).
- Ambient temperature: -25°C to 50°C. The coolant heater is needed when the temperature is below 5°C
- Humidity: Less than 90%.
- Altitude: Below one thousand (1000) meters above sea level.

Factory Inspection

- Inspection items.
- Protection devices working test.
- Starting ability in normal temperature.
- 50% rated power load moment capability.
- Voltage deviation and speed variation: 0%, 25%, 50%, 75%, 100%, 110% Load.

Painting Process


- Painting process specifications and colors are based on the manufacturer's standard.
- The customer could also choose the color which the manufacturer offers.

2 General Features

- Kubota engine D905-BG
- Close coupled to LSA alternator LSA40VS0
- Microprocessor control module PLC-920
- SCHNEIDER main circuit breaker: 16A
- Rotate speed governor: Mechanical governor
- Excitation system: Self excited,SHUNT
- A.V.R model: R220
- Key switch
- Emergency stop switch
- ATS(automatic transfer switch)receptacle

3 Equipment


General technical data

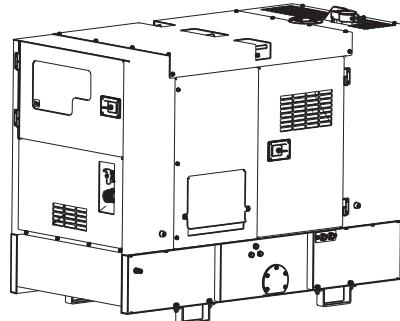

Model.....	QSV7KS-AU
Tank capacity.....	80L
Dry weight.....	560kg
Sound pressure level @ 7m	59.0dBA
Dimensions L×W×H.....	1450x640x950mm
Standby Power	7.5kVA/6kW
Prime Power	6.6kVA/5.3kW


Voltage	380V	400V	415V	440V
Ampere	10.0A	9.53A	9.18A	8.66A
Genset Fuel Consumption				
Frequency/Load	25%	50%	75%	100%
50Hz (L/h)	N/A	1.1	1.6	2.1
				2.3

Diesel engine

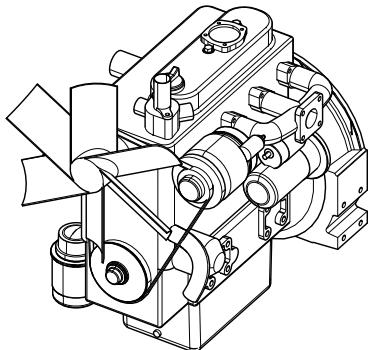


Engine Manufacturer/Brand.....	KUBOTA
Engine Model.....	D905-BG
Dimensions L×W×H.....	551×395×605mm
Dry Weigh (approx.)	93Kg
Number of Cylinders.....	3
Bore	72mm
Stroke	73.6mm
Displacement.....	0.898L
Compression Ratio.....	23
Type of injection.....	Direct injection
Intake System.....	Natural aspirated
Intake Resistance.....	$\leq 1.96\text{kPa}$
Cooling System	Water cooled
Fan	Pusher
Battery Voltage	12V
Type of Fuel.....	No.2-D (ASTMD975)
Type of Oil	APICD
Oil Capacity	5.1L
Type of Coolant	Glycol mixture
Coolant Capacity	N/A
Back Pressure	$\leq 7.07\text{kPa}$
Standby Power	7.4kW
Prime Power	6.6kW
Fuel Consumption(100%load).....	2.1L/h

Alternator

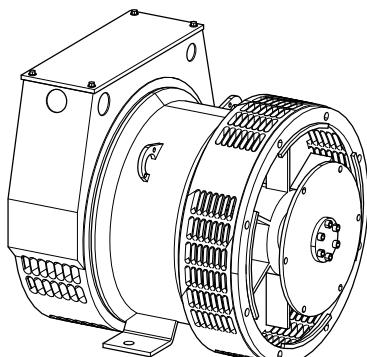

Alternator Manufacturer/Brand	Leroy Somer
Alternator Model	LSA40VS0
Exciter.....	Brushless
Cooling Fan	Cast alloy aluminum
Windings.....	100% copper
Insulation Class	H
Winding Pitch.....	2/3
Terminals	12
Drip Proof	IP23
Altitude.....	$\leq 1000\text{m}$
Overspeed	2250rpm
Air Flow.....	N/A
Voltage Regulation	$\pm 1.0\%$
Total Harmonic TGH / THCat no load < 1.5 % - on load < 5%	
Telephone Interference.....	THF<2%;TIF<50

PLC-920 Control System

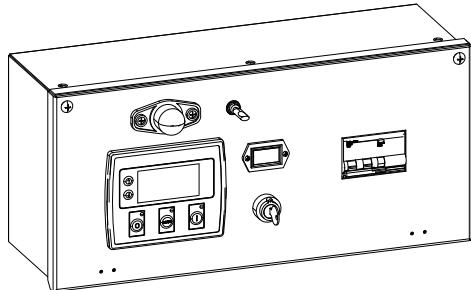


PLC-920 is an advanced control module based on microprocessor designed to control the engine via push buttons on the front panel. The module is used to start and stop the engine and indicate fault conditions, automatically shutting down the engine and giving a true first up fault condition of an engine failure.


Standard Control Function

- Manual Engine Control Module
- Low Oil Pressure
- High Engine Temperature
- Auxiliary Shutdown
- Overspeed Protection
- Protection hold-off timer
- Charge Failure warning

4 Overall Dimensions

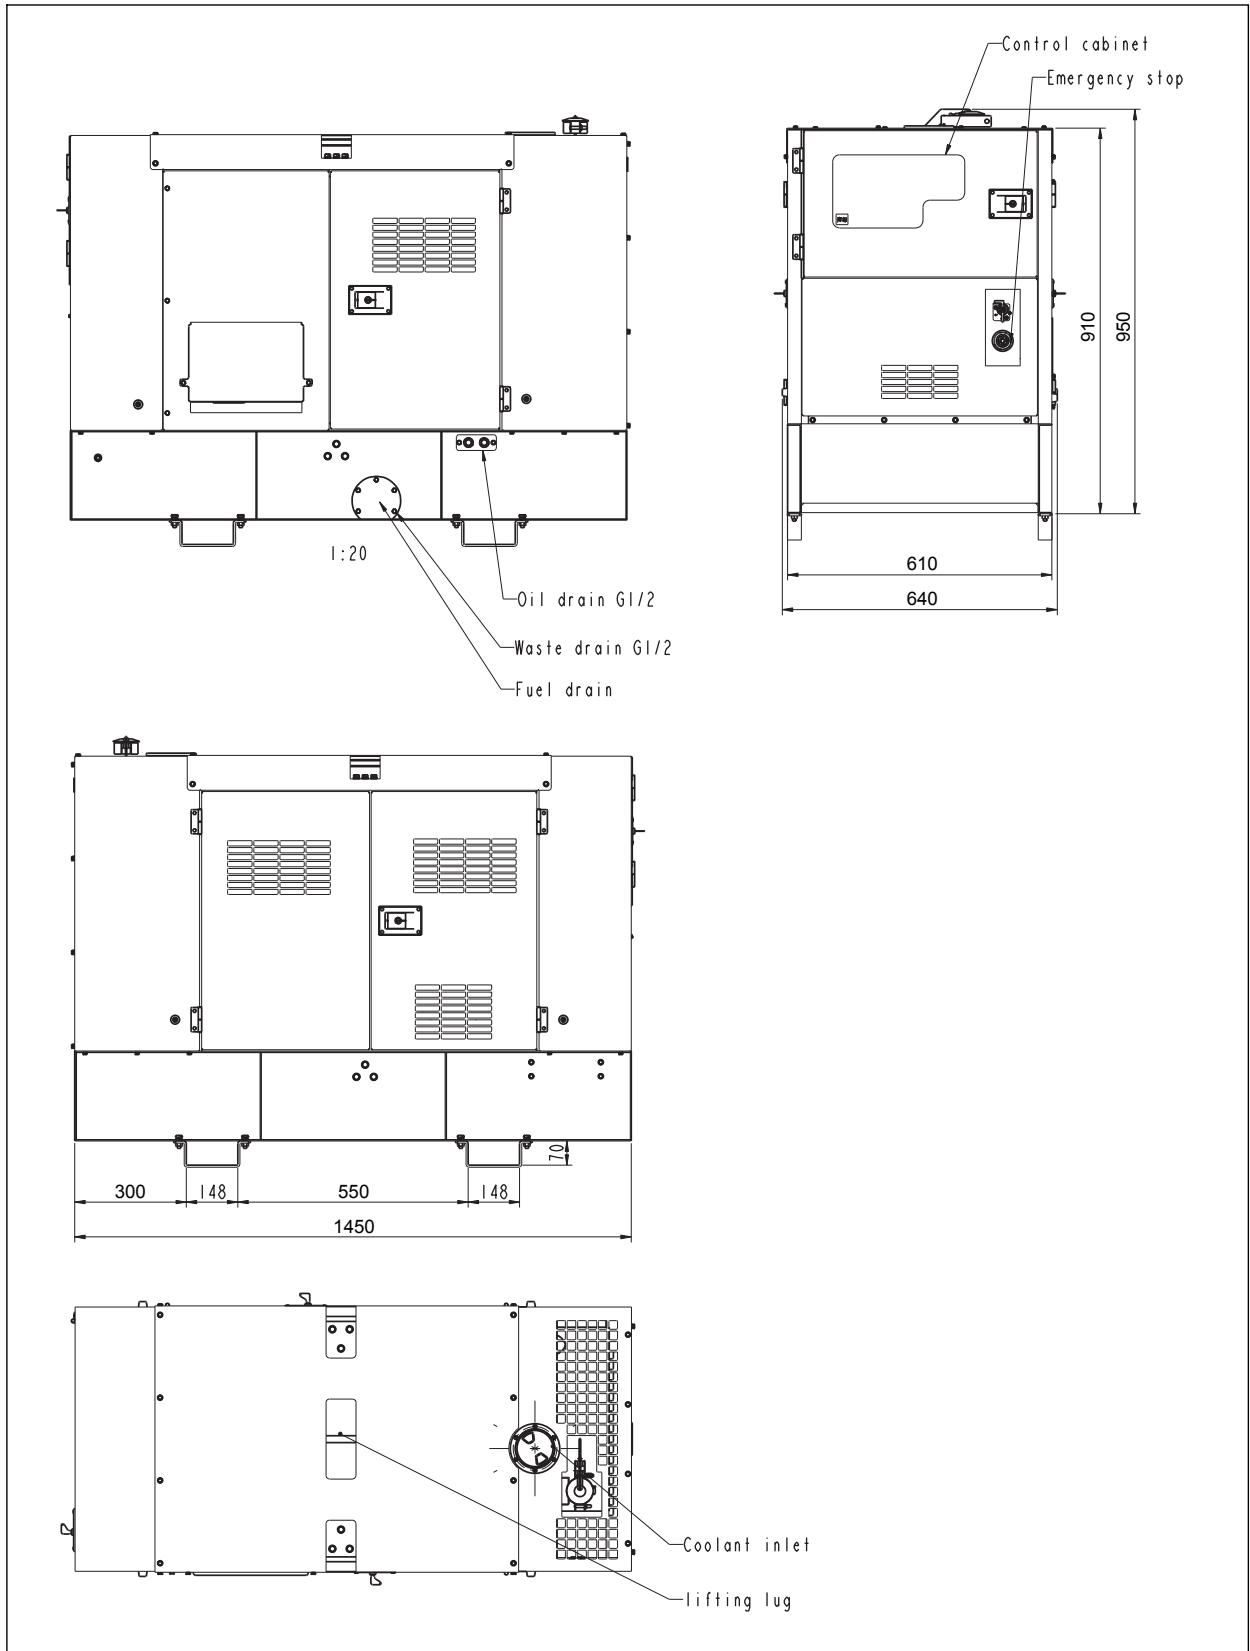

5 Control System

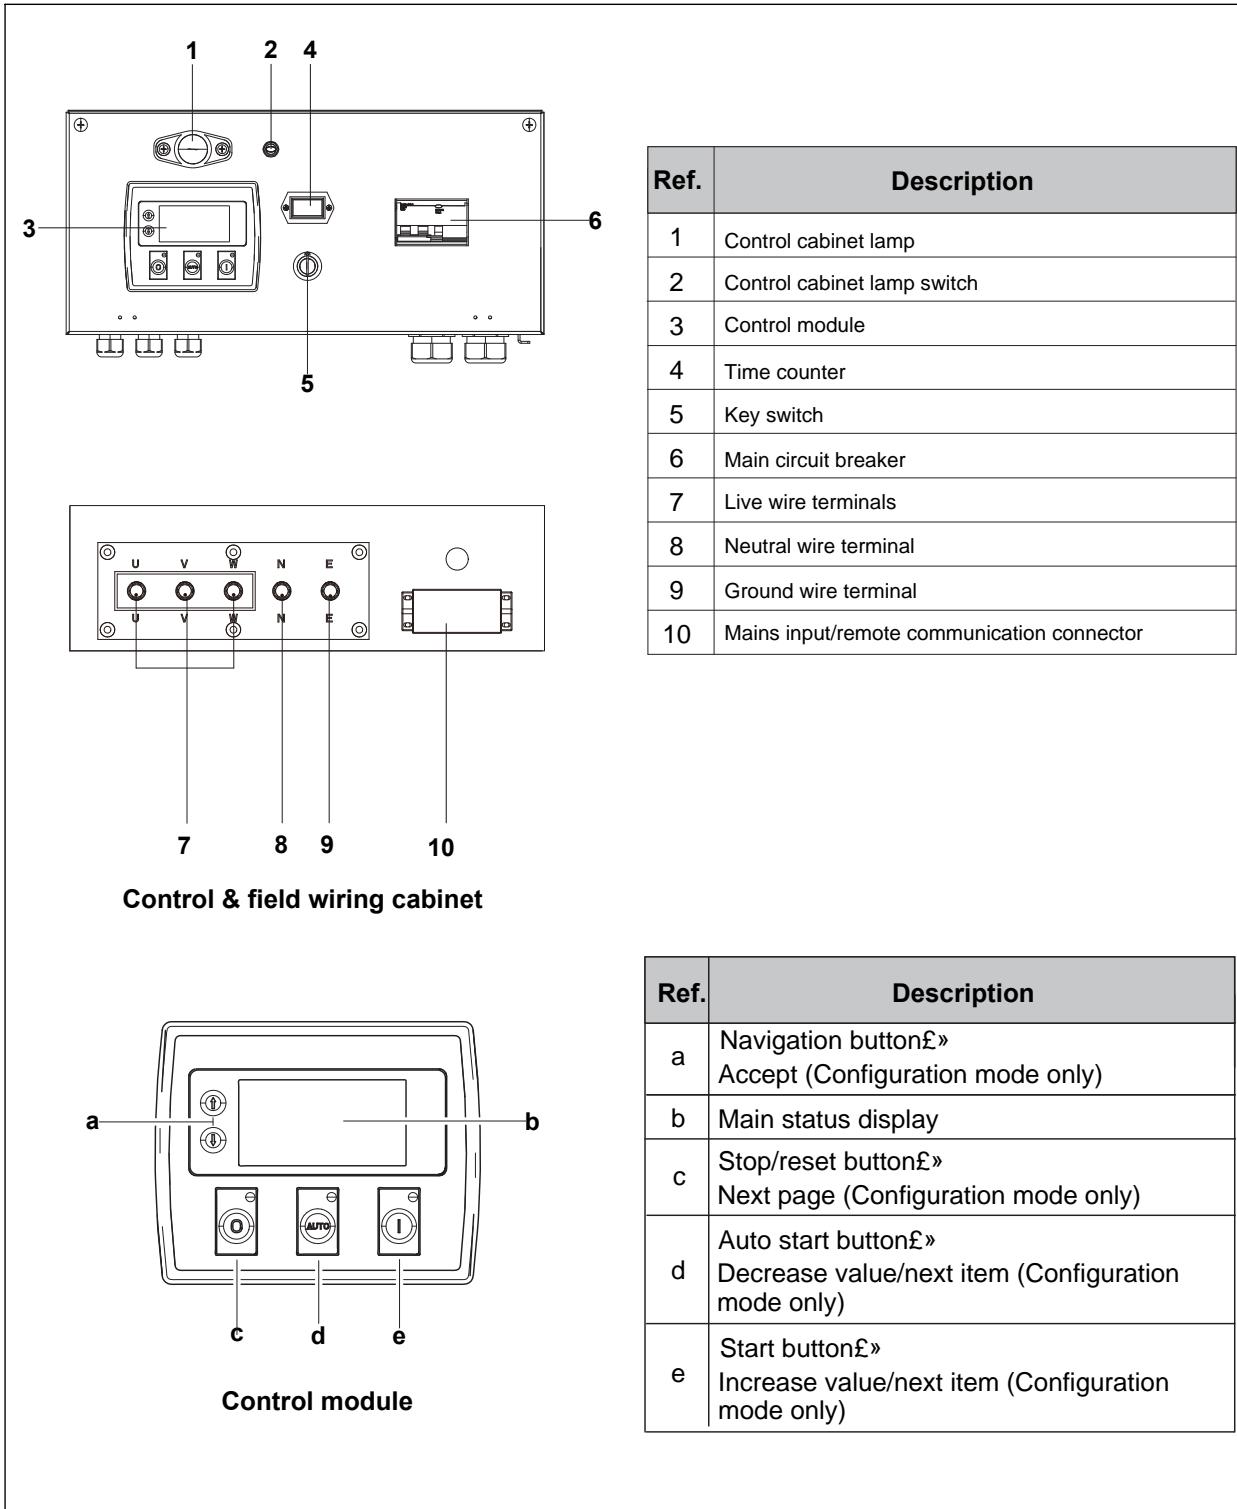

1000033864-A2-E
10.2020

<http://www.powerlinkworld.com>

*Specification may change without prior notice. For more info.,
contact Power Link or your local distributors please.*

©2020 POWERLINK